


Screed Mesh



IB BETAFENCE
INDUSTRY

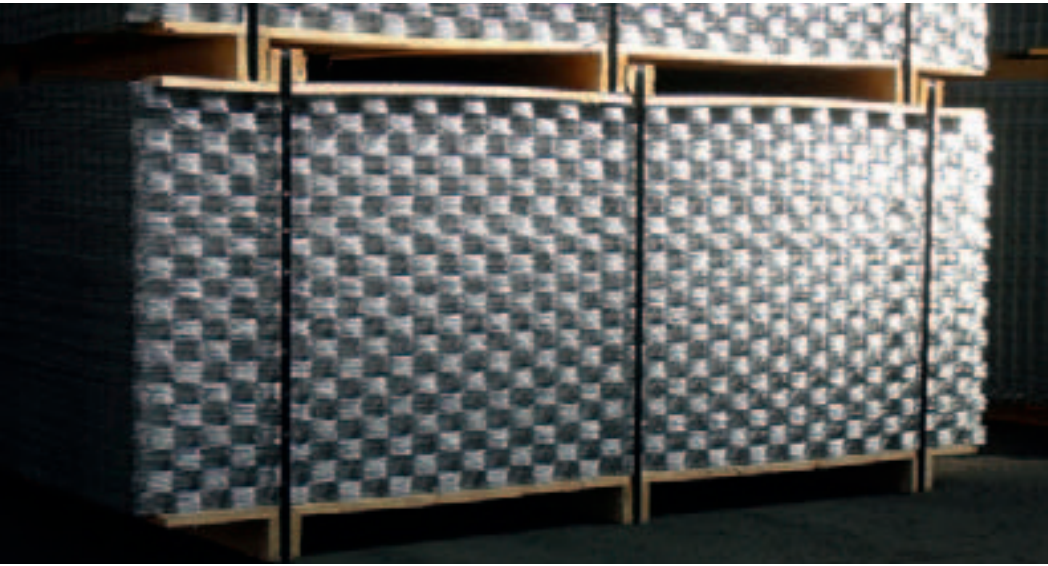

Betafence NV

Deerlijkstraat 58A
 B-8550 Zwevegem
 Tel. +32 56 73 45 00
 Fax +32 56 73 45 99
 info@betafence.com
 www.betafence.com

A range of standard reinforcement panels in pregalvanized wire for immediate delivery to the industrial user or wholesaler.

General use

The use of Screed Mesh in industrial environments is constantly increasing, particularly in the areas of building and construction where reinforcement is very important. Screed mesh distributes internal tensions and forces over the entire surface, decreasing the width of cracks with thermic influences. The mesh has already widely proven its functionality and is a very important product in order to increase the lifetime and durability of floors and walls.

Benefits

- Available from stock
- Inherent strength
- No loose wires
- Quality assurance (EN ISO 9001:2000)
- High quality based on more than 125 years of experience
- In conformance with the relevant norms
- Complete range
- Easy use

Applications

Screed mesh is used as reinforcement of concrete floors and walls and for armature of floating grounds.

Specifications

See Overview Screed Mesh table.
 Tailor made solutions on request:

- Other mesh sizes
- Other wire diameters
- Rolls instead of panels

Coatings

- Welded out of galvanized wire
- Welded out of stainless steel on request



Wire diameter	1,60 mm	1,75 mm	2,00 mm
Panel dimension	1 x 2 m	1 x 2 m	1 x 2 m
Mesh size	50 x 50 mm	50 x 50 mm	50 x 50 mm
Weight per panel	1,22 kg	1,60 kg	1,72 kg
Weight per m ²	610 g/m ²	800 g/m ²	860 g/m ²
Panels per pallet	500	500	400